

Partial storage heating

Series TT KS-S



TT KS-S

Partial thermal-storage heater with individually spot-Welded fins, powdercoated surface, white RAL 9003, only 70 mm depth, infinitely variable built-in thermostat controls your room temperature, connecting lead 1.5 m with plug, 230 V~, incl. stands. **Mobile version.**
IP 20

TT KS-S DSM

Partial storage heater, in addition with **DSM thermostat**. The DSM thermostat can be controlled via the DSM interface via the Internet using the free TECHNOTHERM APP. Separate temperatures and various time programs can be set for each room (see page 8-9). With electronic room temperature control and weekday regulation. Detection of open window. Adaptive start control. Internet option.



Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 500 S	0,50	380 x 630 x 70	22,00	450 605 965	741,67
TT-KS 1000 S	1,00	680 x 630 x 70	36,00	450 610 965	1.043,17
TT-KS 1200 S	1,20	680 x 630 x 70	36,00	450 612 965	1.117,93
TT-KS 1500 S	1,50	980 x 630 x 70	50,00	450 615 965	1.228,88
TT-KS 1800 S	1,80	980 x 630 x 70	50,00	450 618 965	1.251,79
TT-KS 2000 S	2,00	1280 x 630 x 70	62,00	450 620 965	1.295,21
TT-KS 2400 S	2,40	1280 x 630 x 70	62,00	450 624 965	1.344,66
TT-KS 2800 S	2,80	1580 x 630 x 70	82,00	450 628 965	1.474,91

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 500 S DSM	0,50	380 x 630 x 70	22,00	450 605 975	830,91
TT-KS 1000 S DSM	1,00	680 x 630 x 70	36,00	450 610 975	1.123,96
TT-KS 1200 S DSM	1,20	680 x 630 x 70	36,00	450 612 975	1.196,32
TT-KS 1500 S DSM	1,50	980 x 630 x 70	50,00	450 615 975	1.302,44
TT-KS 1800 S DSM	1,80	980 x 630 x 70	50,00	450 618 975	1.322,95
TT-KS 2000 S DSM	2,00	1280 x 630 x 70	62,00	450 620 975	1.365,15
TT-KS 2400 S DSM	2,40	1280 x 630 x 70	62,00	450 624 975	1.413,39
TT-KS 2800 S DSM	2,80	1580 x 630 x 70	82,00	450 628 975	1.540,02

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.



TT KS-S RF

Partial storage heater, but with built-in radio receiver for control with an external thermostat e.g. TPF-ECO (exclusive) and our TYDOM APP. Necessary for control over the Internet, range within the building approx. 30 m (depending on the type of construction), radio frequency 868 MHz (EN 300 200 standard), for ECO interface (see page 12-13). **IP 20** The **TPF-ECO thermostat** and **ECO-Interface** must be ordered separately for all RF models.

TT KS-S plus

Partial storage heater with the "plus" thermostat for easy programming. The thermostat detects open windows and occupies an additive start control with various daily and weekly programs. Large display for good device operations. **IP 24**



Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 500 S RF	0,50	380 x 630 x 70	22,00	450 605 955	794,73
TT-KS 1000 S RF	1,00	680 x 630 x 70	36,00	450 610 955	1.097,43
TT-KS 1200 S RF	1,20	680 x 630 x 70	36,00	450 612 955	1.173,41
TT-KS 1500 S RF	1,50	980 x 630 x 70	50,00	450 615 955	1.283,15
TT-KS 1800 S RF	1,80	980 x 630 x 70	50,00	450 618 955	1.304,86
TT-KS 2000 S RF	2,00	1280 x 630 x 70	62,00	450 620 955	1.349,48
TT-KS 2400 S RF	2,40	1280 x 630 x 70	62,00	450 624 955	1.397,72
TT-KS 2800 S RF	2,80	1580 x 630 x 70	82,00	450 628 955	1.527,96

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 500 S plus	0,50	380 x 630 x 70	22,00	450 605 945	769,41
TT-KS 1000 S plus	1,00	680 x 630 x 70	36,00	450 610 945	1.072,10
TT-KS 1200 S plus	1,20	680 x 630 x 70	36,00	450 612 945	1.146,87
TT-KS 1500 S plus	1,50	980 x 630 x 70	50,00	450 615 945	1.256,62
TT-KS 1800 S plus	1,80	980 x 630 x 70	50,00	450 618 945	1.279,53
TT-KS 2000 S plus	2,00	1280 x 630 x 70	62,00	450 620 945	1.322,95
TT-KS 2400 S plus	2,40	1280 x 630 x 70	62,00	450 624 945	1.372,39
TT-KS 2800 S plus	2,80	1580 x 630 x 70	82,00	450 628 945	1.503,83

Discount group TT_200
ge.

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

Partial storage heating

Series TT KS-N



TT KS-N

Low partial thermal-storage heater with individually spot-Welded fins, powdercoated surface, white RAL 9003, only 70 mm depth, infinitely variable built-in thermostat controls your room temperature, connecting lead 1.5 m with plug, 230 V~, incl. stands. **Mobile version.**
IP 20

TT KS-N DSM

Low partial thermal-storage heater , in addition with DSM thermostat. The DSM thermostat can be controlled via the DSM interface (to be ordered separately, see page 111) via the Internet using the free TECHNOTHERM APP. Separate temperatures and various time programs can be set for each room (see page 8-9). With electronic room temperature control and weekday regulation. Detection of open window. Adaptive start control. Internet option (see page 111).



Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 800 N	0,80	680 x 340 x 70	21,00	450 308 965	774,23
TT-KS 1200 N	1,20	980 x 340 x 70	24,50	450 312 965	997,33
TT-KS 1600 N	1,60	1280 x 340 x 70	34,50	450 316 965	1.204,76
TT-KS 2000 N	2,00	1580 x 340 x 70	38,00	450 320 965	1.232,50


Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 800 N DSM	0,80	680 x 340 x 70	21,00	450 308 975	861,07
TT-KS 1200 N DSM	1,20	980 x 340 x 70	24,50	450 312 975	1.078,13
TT-KS 1600 N DSM	1,60	1280 x 340 x 70	34,50	450 316 975	1.278,33
TT-KS 2000 N DSM	2,00	1580 x 340 x 70	38,00	450 320 975	1.304,86

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

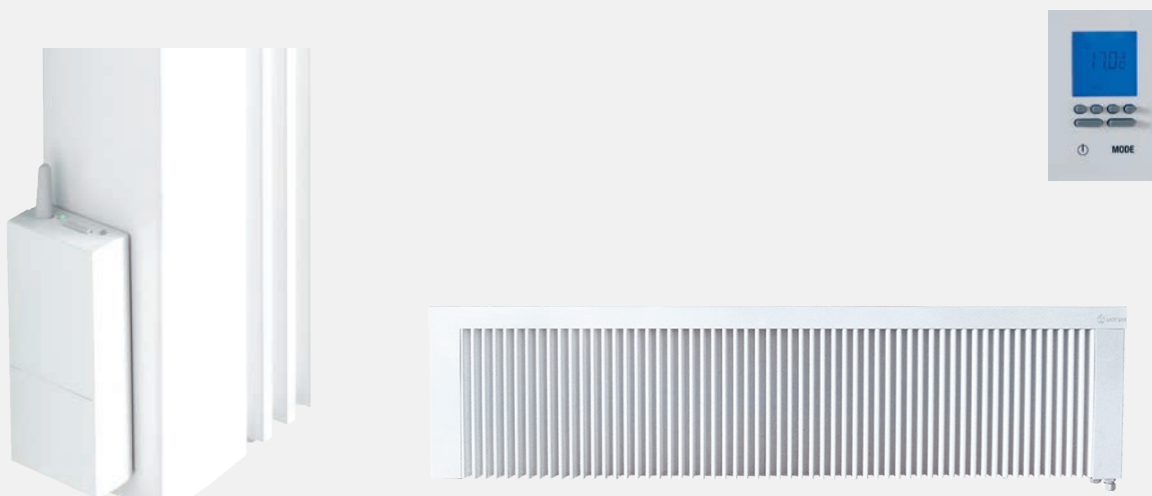

TT KS-N RF

Low partial storage heater, but with built-in radio receiver for control with an external thermostat e.g. TPF-ECO (exclusive) and our TYDOM APP. Necessary for control over the Internet, range within the building approx. 30 m (depending on the type of construction), radio frequency 868 MHz (EN 300 200 standard), for ECO interface (see page 12-13).
IP 20

The TPF-ECO thermostat and ECO-Interface must be ordered separately for all RF models.

TT KS-N plus

Low partial storage heater with the "plus" thermostat for easy programming. The thermostat detects open windows and occupies an additive start control with various daily and weekly programs. Large display for good device operations.
IP 24



Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 800 N RF	0,80	680 x 340 x 70	21,00	450 308 955	827,29
TT-KS 1200 N RF	1,20	980 x 340 x 70	24,50	450 312 955	1.050,40
TT-KS 1600 N RF	1,60	1280 x 340 x 70	34,50	450 316 955	1.256,62
TT-KS 2000 N RF	2,00	1580 x 340 x 70	38,00	450 320 955	1.285,56

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 800 N plus	0,80	680 x 340 x 70	21,00	450 308 945	800,76
TT-KS 1200 N plus	1,20	980 x 340 x 70	24,50	450 312 945	1.026,28
TT-KS 1600 N plus	1,60	1280 x 340 x 70	34,50	450 316 945	1.232,50
TT-KS 2000 N plus	2,00	1580 x 340 x 70	38,00	450 320 945	1.259,04

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

Partial storage heating

Series TT KS-H



TT KS-H DSM

High partial thermal-storage heater , in addition with DSM thermostat. The DSM thermostat can be controlled via the DSM interface (to be ordered separately, see page 111) via the Internet using the free TECHNOTHERM APP. Separate temperatures and various time programs can be set for each room (see page 8-9). With electronic room temperature control and weekday regulation. Detection of open window. Adaptive start control. Internet option (see page 111).

TT KS-H RF

High partial storage heater, but with built-in radio receiver for control with an external thermostat e.g. TPF-ECO (exclusive) and our TYDOM APP. Necessary for control over the Internet, range within the building approx. 30 m (depending on the type of construction), radio frequency 868 MHz (EN 300 200 standard), for ECO interface (see page 12-13).

IP 20

The TPF-ECO thermostat and ECO-Interface must be ordered separately for all RF models.



Model	Power [kW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 1200 H DSM	1,20	380 x 1240 x 70	35,00	450 112 975	1.245,76
TT-KS 1800 H DSM	1,80	550 x 1240 x 70	58,00	450 118 975	1.367,57
TT-KS 2200 H DSM	2,20	680 x 1240 x 70	66,00	450 122 975	1.520,72

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

Model	Power [kW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 1200 H RF	1,20	380 x 1240 x 70	35,00	450 112 955	1.222,86
TT-KS 1800 H RF	1,80	550 x 1240 x 70	58,00	450 118 955	1.351,89
TT-KS 2200 H RF	2,20	680 x 1240 x 70	66,00	450 122 955	1.508,67

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.



TT KS-H plus

High partial storage heater with the "plus" thermostat for easy programming. The thermostat detects open windows and occupies an additional start control with various daily and weekly programs. Large display for good device operations. **IP 24**

Partial storage
Heating



Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 1200 H plus	1,20	380 x 1240 x 70	35,00	450 112 945	1.198,73
TT-KS 1800 H plus	1,80	550 x 1240 x 70	58,00	450 118 945	1.325,36
TT-KS 2200 H plus	2,20	680 x 1240 x 70	66,00	450 122 945	1.483,34

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

Partial storage heating for social facilities

Series TT KS-S LT



TT KS-LT

Surface temperature reduced to max. 60 °C for kindergartens, schools and social institutions (LT = Low Temperature). Surface white powder-coated RAL 9003, only 70 mm deep, a stepless built-in thermostat regulates the room temperature, connection cable 1.5 m with plug, 230 V ~, including feet. **Mobile variant.**


IP 20

TT KS-LT RF

Low temperature partial storage heater, but with built-in radio receiver for control with an external thermostat e.g. TPF-ECO (exclusive) and our TYDOM APP. Necessary for control over the Internet, range within the building approx. 30 m (depending on the type of construction), radio frequency 868 MHz (EN 300 200 standard), for ECO interface (see page 12-13).

IP 20

The TPF-ECO thermostat and ECO-Interface must be ordered separately for all RF models.



Eingetragenes
Gebrauchsmuster

Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 700 S LT	0,70	680 x 630 x 70	36,00	450 607 665	1.166,17
TT-KS 1200 S LT	1,20	980 x 630 x 70	50,00	450 612 665	1.297,62
TT-KS 1500 S LT	1,50	1280 x 630 x 70	62,00	450 615 665	1.391,68
TT-KS 1800 S LT	1,80	1580 x 630 x 70	82,00	450 618 665	1.521,94

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 700 S LT RF	0,70	680 x 630 x 70	36,00	450 607 655	1.218,03
TT-KS 1200 S LT RF	1,20	980 x 630 x 70	50,00	450 612 655	1.351,89
TT-KS 1500 S LT RF	1,50	1280 x 630 x 70	62,00	450 615 655	1.443,54
TT-KS 1800 S LT RF	1,80	1580 x 630 x 70	82,00	450 618 655	1.574,99

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.



TT KS-LT plus

Low temperature partial storage heater with the "plus" thermostat for easy programming. The thermostat detects open windows and occupies an additive start control with various daily and weekly programs. Large display for good device operations.
IP 24

TT KS-LT H RF

High low temp. partial storage heater, but with built-in radio receiver for control with an external thermostat e.g. TPF-ECO (exclusive) and our TYDOM APP. Necessary for control over the Internet, range within the building approx. 30 m (depending on the type of construction), radio frequency 868 MHz (EN 300 200 standard), for ECO interface (see page 12-13).
IP 20

The TPF-ECO thermostat and ECO-Interface must be ordered separately for all RF models.

TT KS-LT H plus

High low temperature partial storage heater with the "plus" thermostat for easy programming. The thermostat detects open windows and occupies an additive start control with various daily and weekly programs. Large display for good device operations.
IP 24



Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 700 S LT plus	0,70	680 x 630 x 70	36,00	450 607 645	1.196,33
TT-KS 1200 S LT plus	1,20	980 x 630 x 70	50,00	450 612 645	1.327,77
TT-KS 1500 S LT plus	1,50	1280 x 630 x 70	62,00	450 615 645	1.421,84
TT-KS 1800 S LT plus	1,80	1580 x 630 x 70	82,00	450 618 645	1.552,07

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 870 LT H RF	0,87	380 x 1240 x 70	35,00	450 108 655	1.295,21
TT-KS 1240 LT H RF	1,24	550 x 1240 x 70	58,00	450 112 655	1.420,62
TT-KS 1740 LT H RF	1,74	680 x 1240 x 70	66,00	450 170 655	1.544,84

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.

Model	Power [KW]	Dimensions B x H x T [mm]	Weight [kg approx.]	Order number	Price [Euro]
TT-KS 870 LT H plus	0,87	380 x 1240 x 70	35,00	450 108 645	1.272,30
TT-KS 1240 LT H plus	1,24	550 x 1240 x 70	58,00	450 112 645	1.396,51
TT-KS 1740 LT H plus	1,74	680 x 1240 x 70	66,00	450 170 645	1.521,94

Discount group TT_200

All units can also be ordered in IPX4 for a 60.30 Euro surcharge.