


# CONVECTOR CPH and CVS

SLIM AND FAST



- Simple operating
- Adjustment range in 7 levels
- level 0 = OFF
- 6 levels from 5 °C to 30 °C
- Temperature detector is integrated in the lateral surface
- Anti-freeze mode can be set

Device is "ON" and in heating mode      Device is "ON" but no heating mode      Device is "OFF"

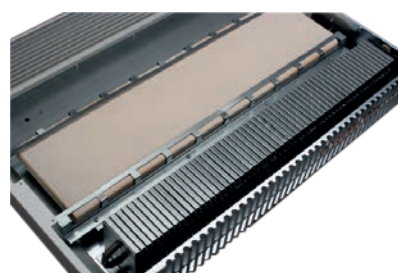

The desired room temperature is regulated by a thermoregulator built-in into the device. For this purpose, you can set the regulator button to 6 different levels from level 1 (5 °C, anti-freeze) to level 6 (approx. 30 °C). The associated temperature sensor is located on the underside of the side panel and is set by your installer.

# Direct heating

## Convector Series CPH and CVS



### Convector CPH, CPH E

With special ceramic storage, Aluminium grill outlet, antifreeze function, safety thermostat, sheet steel housing, cable approx. 0,75 m long, 230 V~ connection, 5 °C to 35 °C, colour RAL 9010, protection class I. E-Series with electronic room temperature control. Incl. stands. **Mobile version. IP 24**

### Convector CVS, CVS E

Aerial outlet of anodised aluminium, bipolar switch "On/Off" and capillary controller as temperature regulator, antifreeze function, safety thermostat, sheet steel housing, cable approx. 1m long, 230 V~ connection, 5 °C to 35 °C, Colour RAL 9002, protection class I. E-Series with electronic room temperature control. Incl. stands. **Mobile version. IP 24**

| Model      | Power [KW] | Dimensions<br>B x H x T [mm] | Weight<br>[kg approx.] | Order number | Price [Euro] |
|------------|------------|------------------------------|------------------------|--------------|--------------|
| CPH 1000   | 1,00       | 415 x 445 x 85               | 8,00                   | 429 753 102  | 270,14       |
| CPH 1500   | 1,50       | 565 x 445 x 85               | 10,00                  | 429 753 104  | 294,04       |
| CPH 2000   | 2,00       | 695 x 445 x 85               | 13,00                  | 429 753 106  | 326,25       |
| CPH 2400   | 2,40       | 915 x 445 x 85               | 16,00                  | 429 753 108  | 337,68       |
| CPH 1000 E | 1,00       | 415 x 445 x 85               | 8,00                   | 429 753 302  | 320,00       |
| CPH 1500 E | 1,50       | 565 x 445 x 85               | 10,00                  | 429 753 304  | 343,91       |
| CPH 2000 E | 2,00       | 695 x 445 x 85               | 13,00                  | 429 753 306  | 376,12       |
| CPH 2400 E | 2,40       | 915 x 445 x 85               | 16,00                  | 429 753 308  | 388,59       |

Discount group TT\_200

| Model    | Power [KW] | Dimensions<br>B x H x T [mm] | Weight<br>[kg approx.] | Order number | Price [Euro] |
|----------|------------|------------------------------|------------------------|--------------|--------------|
| CVS 501  | 0,50       | 345 x 445 x 85               | 3,70                   | 429 752 100  | 164,16       |
| CVS 1001 | 1,00       | 415 x 445 x 85               | 4,80                   | 429 752 102  | 188,06       |
| CVS 1501 | 1,50       | 565 x 445 x 85               | 6,00                   | 429 752 104  | 206,76       |
| CVS 2001 | 2,00       | 695 x 445 x 85               | 7,00                   | 429 752 106  | 220,27       |
| CVS 2501 | 2,50       | 915 x 445 x 85               | 8,40                   | 429 752 107  | 235,85       |
| CVS 501  | 0,50       | 345 x 445 x 85               | 3,70                   | 429 752 130  | 217,15       |
| CVS 1001 | 1,00       | 415 x 445 x 85               | 4,80                   | 429 752 132  | 241,05       |
| CVS 1501 | 1,50       | 565 x 445 x 85               | 6,00                   | 429 752 134  | 258,71       |
| CVS 2001 | 2,00       | 695 x 445 x 85               | 7,00                   | 429 752 136  | 272,22       |
| CVS 2501 | 2,50       | 915 x 445 x 85               | 8,40                   | 429 752 137  | 288,84       |

Discount group TT\_200