




BDO

Bouche d'insufflation et d'extraction




Encombrement

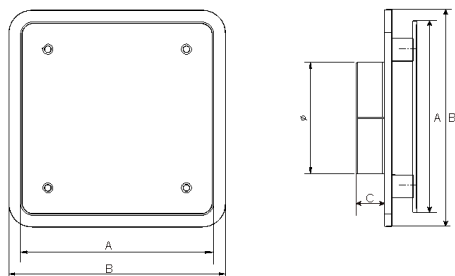


BDO	A	B	C	ø
80	136	151	20	77,3
100	185	205	30	98
125	185	205	30	118,1
160	230	250	36,8	148
200	275	300	45,8	189,5


Réglages

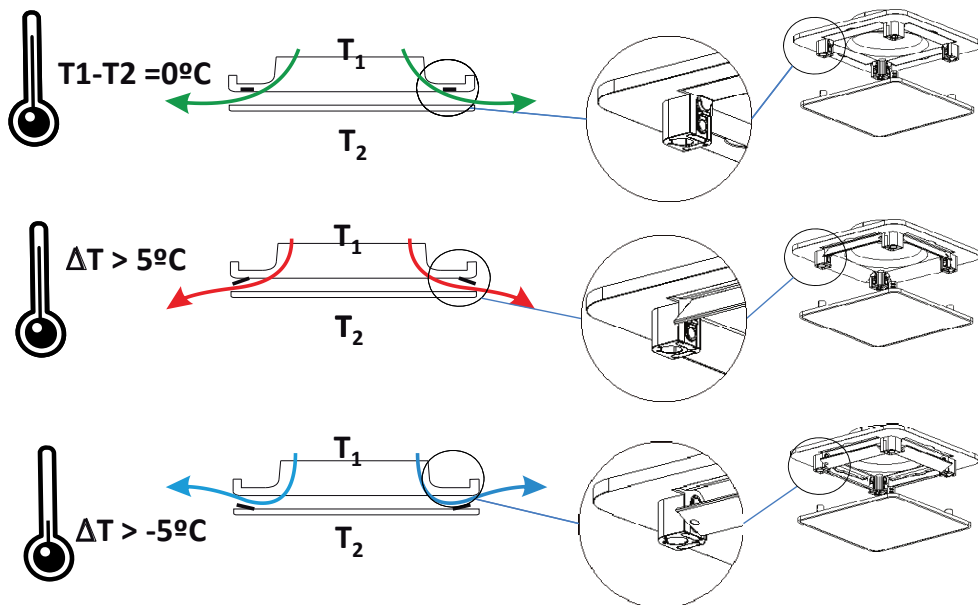


Sens de soufflage

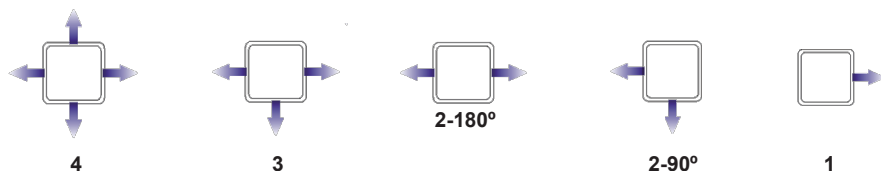

Extracción y Impulsión - Extract and Blowing **Extraction et soufflage – Estrazione e Immissione**

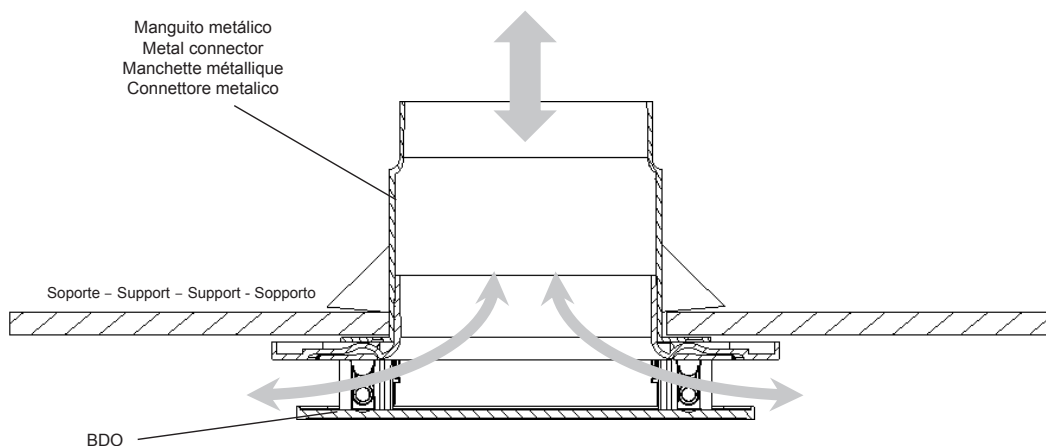


Accessoire




Regulador RD – Regulator RD
 Régulateur RD - Regolatore RD

Tipo- Type		
BDO 100	BDO 160	BDO 200
RD 15 m ³ /h	RD 120 m ³ /h	RD 240 m ³ /h
RD 30 m ³ /h	RD 150 m ³ /h	RD 270 m ³ /h
RD 45 m ³ /h	RD 180 m ³ /h	RD 300 m ³ /h
RD 60 m ³ /h	RD 210 m ³ /h	RD 350 m ³ /h
RD 75 m ³ /h	RD 240 m ³ /h	RD 400 m ³ /h
-	RD 270 m ³ /h	RD 450 m ³ /h
-		RD 500 m ³ /h

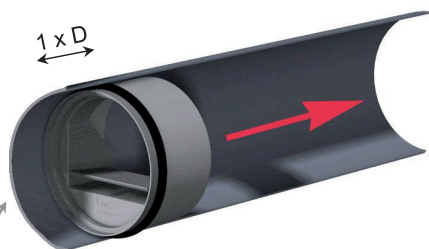

Extracción - Extract – Extraction – Estrazione


Lado de la BDO
 Side of the BDO
 Côté BDO
 Lato del BDO

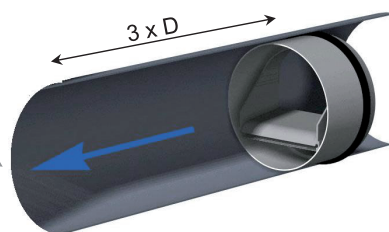

Impulsión – Blowing – soufflage – Immissione


Montaje - Mounting - Montage - Montaggio
D80mm & 125 mm

Extracción y Impulsión - Extract and Blowing
Extraction et soufflage - Estrazione e Immissione

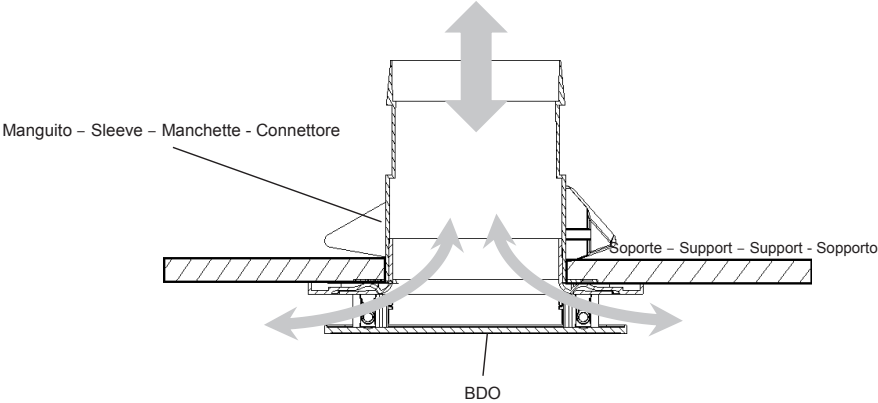

Extracción - Extract
Extraction - Estrazione

Impulsión - Blowing
Soufflage - Immissione

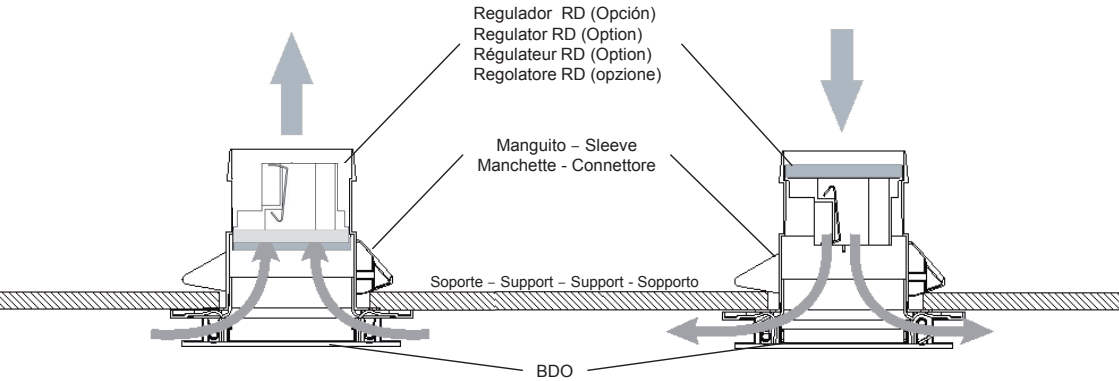

Accesorio - Accessory - Accessoire - Accessori




Regulador RD BP SM - Regulator RD BP SM
Régulateur RD BP SM - Regolatore RD BP SM

		LW (dB(A))					
							
		DP (Pa)			DP (Pa)		
BDO 80 + RD BP	Qv (m³/h)	20	60	100	20	60	100
	15	25	27	32	26	33	38
	30	26	30	35	28	40	46

BDO	Qv (m³/h)										
		DP (Pa)	Lw (dB(A))	DP (Pa)	Lw (dB(A))	DP (Pa)	Lw (dB(A))	DP (Pa)	Lw (dB(A))	DP (Pa)	Lw (dB(A))
80	15	2	24	1	23	2	24	3	24	8	24
	30	6	24	3	23	5	24	11	24	30	26
	45	12	25	7	24	11	25	23	27	66	35
	60	21	27	12	26	20	28	40	34	117	44
100	15	2	<20	1	<20	1	21	2	21	4	22
	30	3	24	3	23	4	24	9	24	28	25
	45	8	25	5	25	7	26	14	28	31	30
	60	14	29	8	27	11	28	22	30	58	35
	75	29	31	12	29	18	31	36	35	99	44
125	45	4	24	3	23	5	24	10	24	28	25
	60	7	25	5	25	8	26	17	28	49	33
	75	11	27	8	27	13	28	26	32	73	39
	90	15	29	11	28	18	30	36	35	101	44
	120	39	31	18	31	31	34	63	40	-	-
160	150	39	35	28	36	48	39	97	47	-	-
	120	13	<20	9	23	15	21	30	32	-	-
	150	18	24	12	26	18	28	35	37	-	-
	180	26	29	18	32	27	33	50	42	-	-
	200	32	32	22	34	33	37	62	44	-	-
200	210	35	33	24	36	36	38	69	46	-	-
	240	45	37	31	40	47	42	91	49	-	-
	240	30	29	20	28	32	32	59	43	-	-
	270	37	32	24	31	40	36	74	48	-	-
	300	46	36	30	34	50	39	-	-	-	-
200	350	63	40	41	39	67	44	-	-	-	-

Alcance - Throw - Portée - Lancio

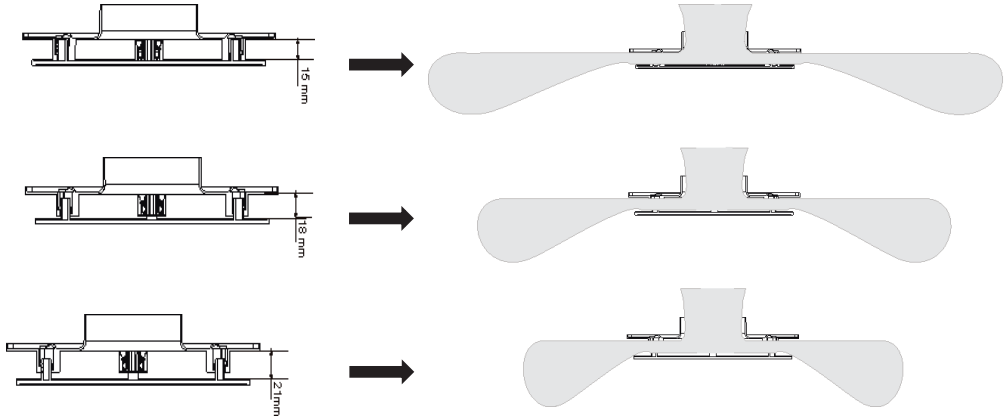



S&P France

Avenue de la Côte Vermeille

66300 THUIR

Tel. 04 68 530 260

Fax 04 68 531 658

www.solerpallau.fr

Ref. 9023015202

